

DIELECTRIC RESONATOR OSCILLATOR


CONNECTORIZED MODEL: DRO80

FREQUENCY

8.0 GHz

FEATURES:

- ▶ Exceptional Phase Noise Performance
- ▶ Lead Free RoHS Compliant

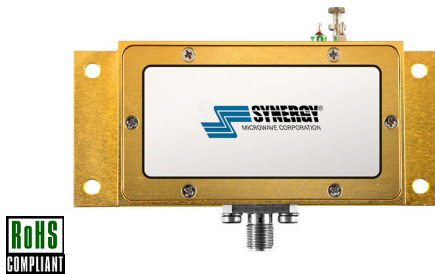


Phase Noise



SPECIFICATIONS

Frequency	8.0 GHz												
Tuning Voltage	1 - 15 VDC												
Bias Voltage	+7 - 10 VDC @ 70 mA (Max.)												
Output Power	+8 dBm (Min.)												
Tuning Sensitivity	0.25 MHz/V (Typ.)												
Thermal Drift	2 ppm / °C (Typ.)												
Output Impedance	50 Ohms (Nom.)												
Harmonic Suppression	30 dBc (Typ.)												
Tuning Port Capacitance	1 nF (Typ.)												
Modulation Bandwidth	20 MHz (Typ.)												
Phase Noise	<table><tr><th>Offset</th><th>dBc/Hz (Typ.)</th></tr><tr><td>1 kHz</td><td>-85</td></tr><tr><td>10 kHz</td><td>-114</td></tr><tr><td>100 kHz</td><td>-140</td></tr><tr><td>1 MHz</td><td>-160</td></tr><tr><td>10 MHz</td><td>-170</td></tr></table>	Offset	dBc/Hz (Typ.)	1 kHz	-85	10 kHz	-114	100 kHz	-140	1 MHz	-160	10 MHz	-170
Offset	dBc/Hz (Typ.)												
1 kHz	-85												
10 kHz	-114												
100 kHz	-140												
1 MHz	-160												
10 MHz	-170												
Jitter	30 fs (@ 1 kHz to 30 MHz) (Typ.)												
Operating Temperature Range	-15 to +75 °C												

Package # 391

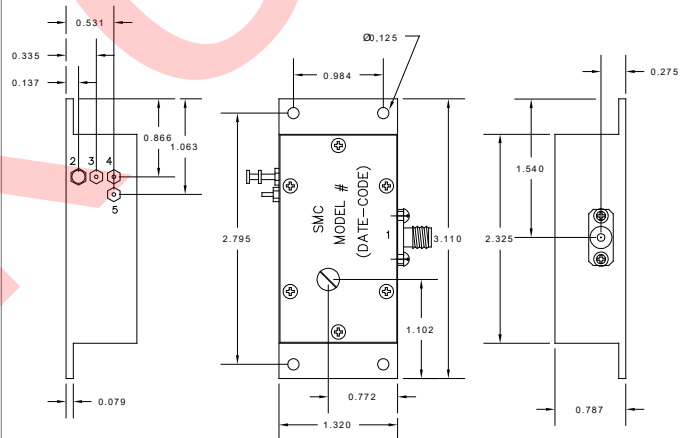

Port Configuration

Pin 1 - RF Output
Pin 2 - GND
Pin 4 - Tuning Voltage V_T
Pin 5 - Supply Voltage V_S
Pin 3 - V Temperature

Absolute Maximum Ratings

Storage Temp. Range	-30 to +85 °C
Bias Voltage	+10.5 V
Tuning Voltage	+16.0 V
DC Voltage Applied to RF Out	±25 V

Notes:

1. Access to the tuning screw is underneath the label. Tuning screws are factory locked for optimum performance at the center frequency. Tuning of the mechanical screw can cause significant shifts in frequency and adversely affect overall performance. Warranty is void if seal over tuning screw is damaged.
2. Test data measured with bias voltage at +8V.
3. Specifications guaranteed at 8.0 GHz.

Copyright © Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 USA

Tel: (973) 881-8800 • Fax: (973) 881-8361

E-Mail: sales@synergymwave.com • Website: <http://www.synergymwave.com>



Patents : <http://www.synergymwave.com/patents>

DIELECTRIC RESONATOR OSCILLATOR

CONNECTORIZED MODEL: DRO80

FREQUENCY

8.0 GHz

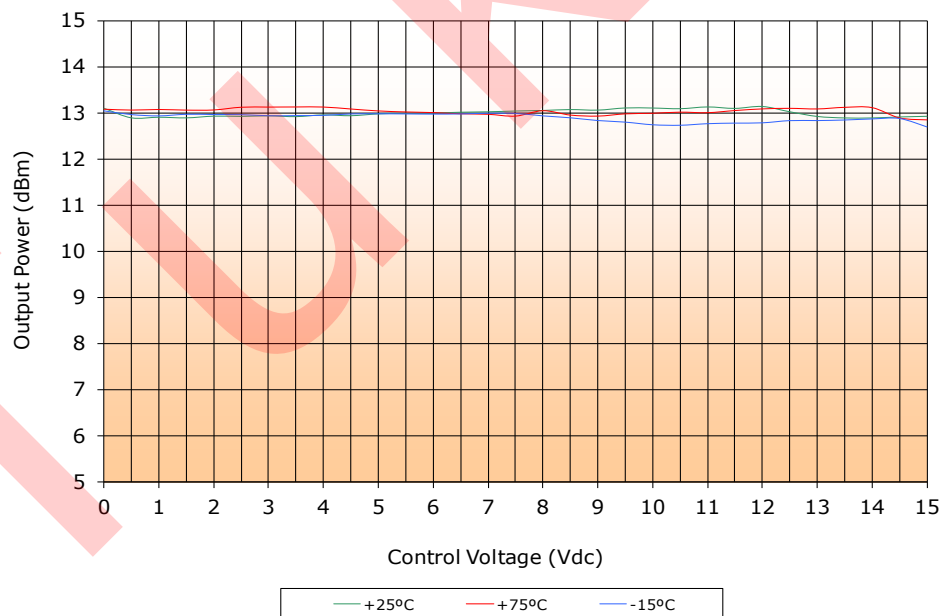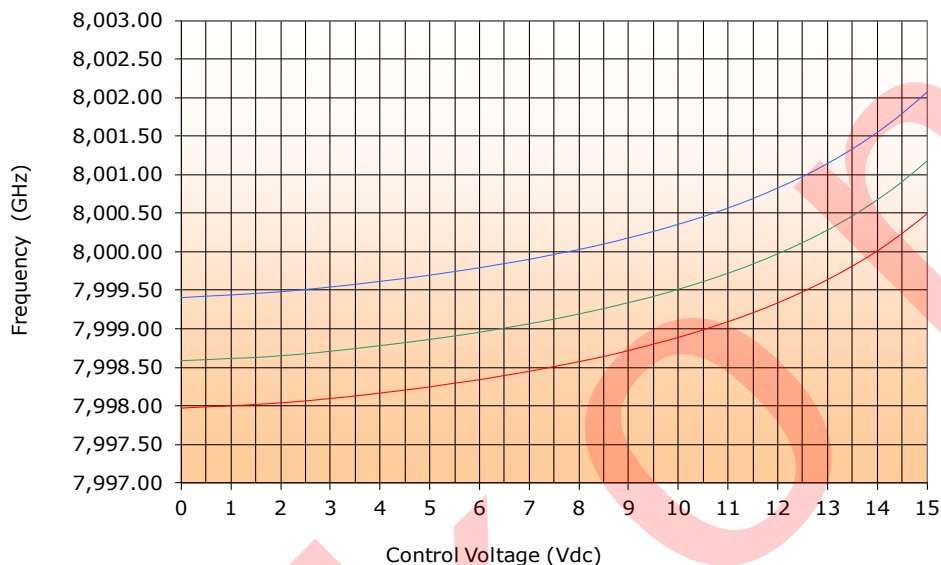


PERFORMANCE PLOTS

DIELECTRIC RESONATOR OSCILLATOR

CONNECTORIZED MODEL: DRO80

FREQUENCY

8.0 GHz

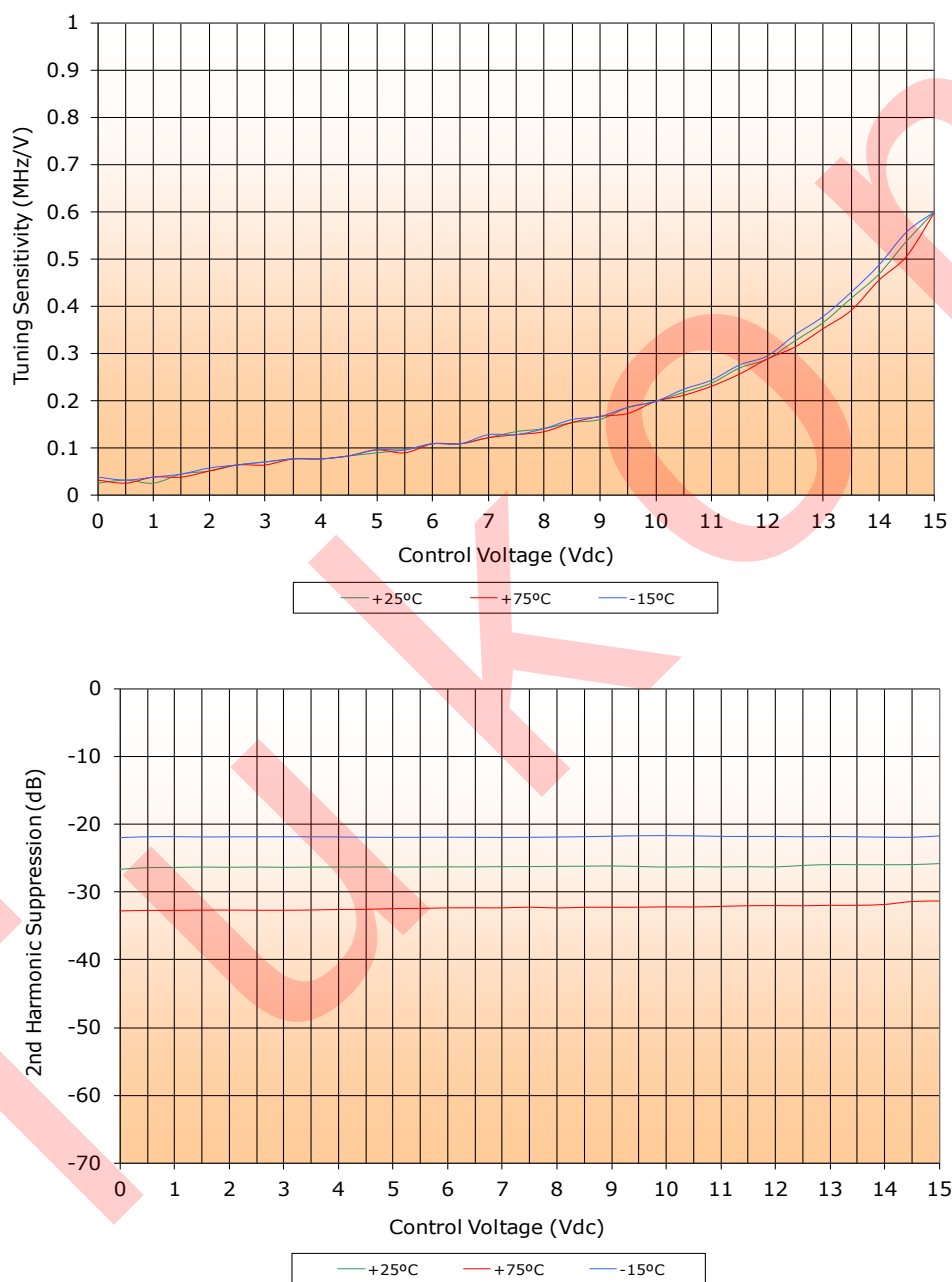

PERFORMANCE PLOTS