

DIELECTRIC RESONATOR OSCILLATOR


SURFACE MOUNT MODEL: SDRO800-8XT

FREQUENCY


8 GHz

FEATURES:

- ▶ Extended Operating Temperature Range
- ▶ Exceptional Phase Noise Performance
- ▶ Small Size Surface Mount
- ▶ Lead Free RoHS Compliant




Phase Noise

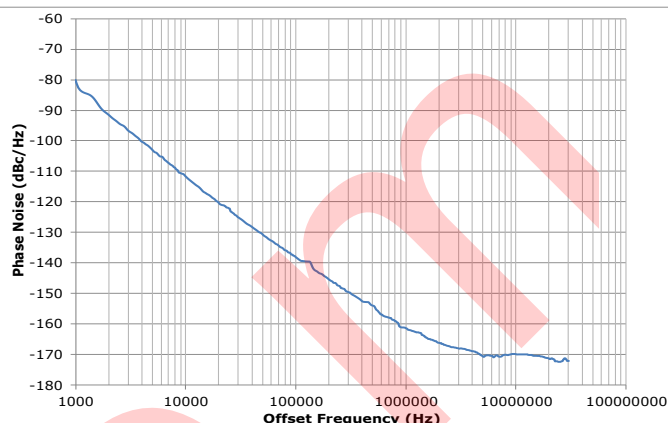

SPECIFICATIONS

Frequency	8 GHz										
Tuning Voltage	1 - 10 VDC										
Bias Voltage	+8 VDC @ 25 mA (Max.)										
Output Power	+1 dBm (Min.)										
Tuning Sensitivity	1.5 MHz/V (Typ.)										
Thermal Drift	5 ppm / °C (Typ.)										
Output Impedance	50 Ohms (Nom.)										
Harmonic Suppression	45 dBc (Typ.)										
Frequency Pulling	1 MHz (Typ. @ 1.75:1 VSWR)										
Frequency Pushing	400 kHz/V (Typ.)										
Tuning Port Capacitance	10 pF (Typ.)										
Phase Noise @ 25°C	<table><tr><th>Offset</th><th>dBc/Hz (Typ.)</th></tr><tr><td>10 kHz</td><td>-111</td></tr><tr><td>100 kHz</td><td>-138</td></tr><tr><td>1 MHz</td><td>-160</td></tr><tr><td>10 MHz</td><td>-170</td></tr></table>	Offset	dBc/Hz (Typ.)	10 kHz	-111	100 kHz	-138	1 MHz	-160	10 MHz	-170
	Offset	dBc/Hz (Typ.)									
	10 kHz	-111									
	100 kHz	-138									
	1 MHz	-160									
10 MHz	-170										
Operating Temperature Range	-40 to +85 °C										

Package # 396

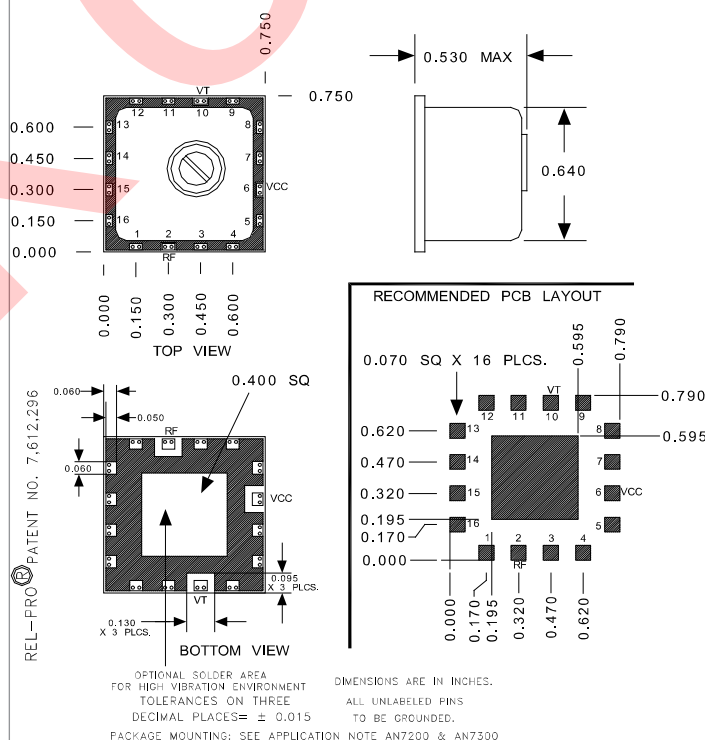

Absolute Maximum Ratings

Storage Temp. Range	-45 to +90 °C
Bias Voltage	+8.5 V
Tuning Voltage	+16 V
DC Voltage Applied to RF Out	±25 V

Notes:



1. Tuning of the mechanical screw can cause significant shifts in frequency and cause irreversible damage to the product. Warranty is void if tuning screw exceeds ±0.5 turn max.
2. Test data measured with bias voltage at +8V.
3. Specifications guaranteed at 8 GHz.

DIELECTRIC RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SDRO800-8XT

FREQUENCY

8 GHz

PERFORMANCE PLOTS

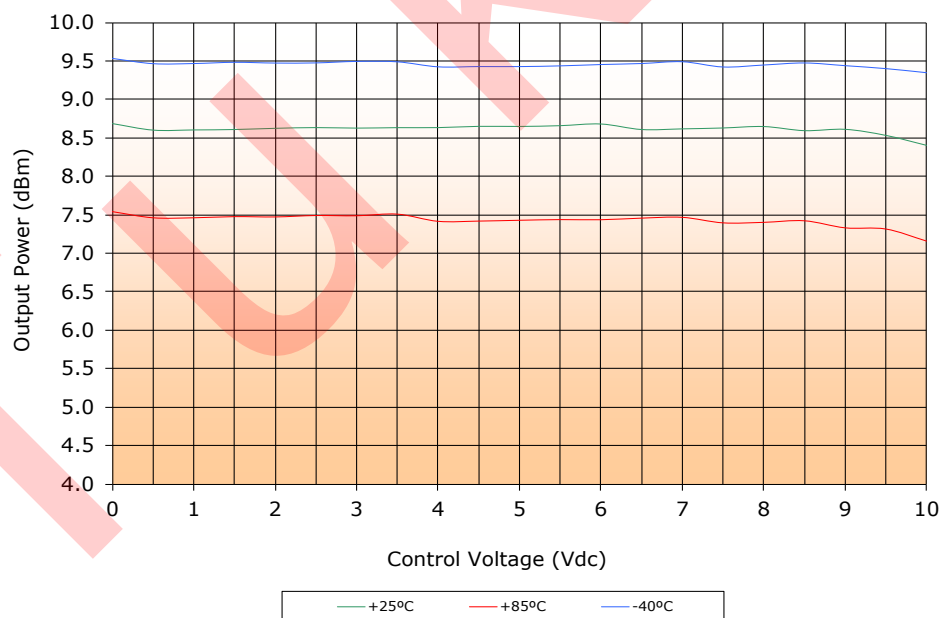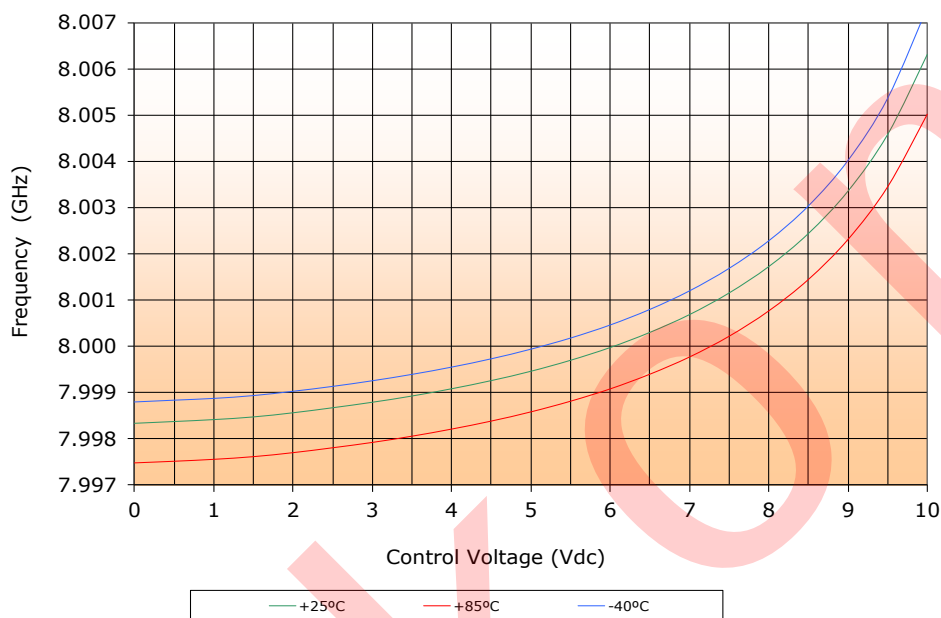


DIELECTRIC RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SDRO800-8XT

FREQUENCY

8 GHz


PERFORMANCE PLOTS

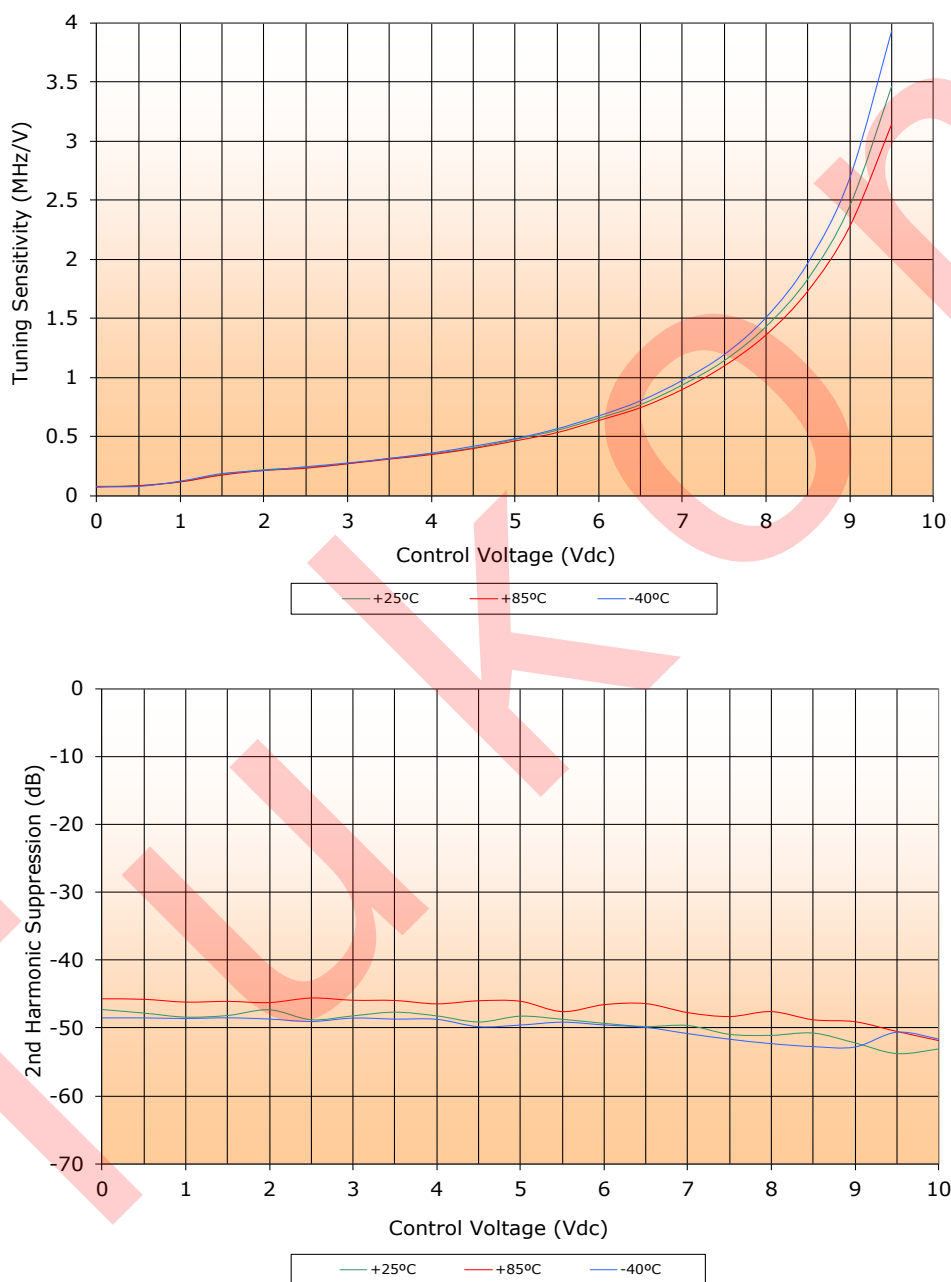

DIELECTRIC RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SDRO800-8XT

FREQUENCY

8 GHz

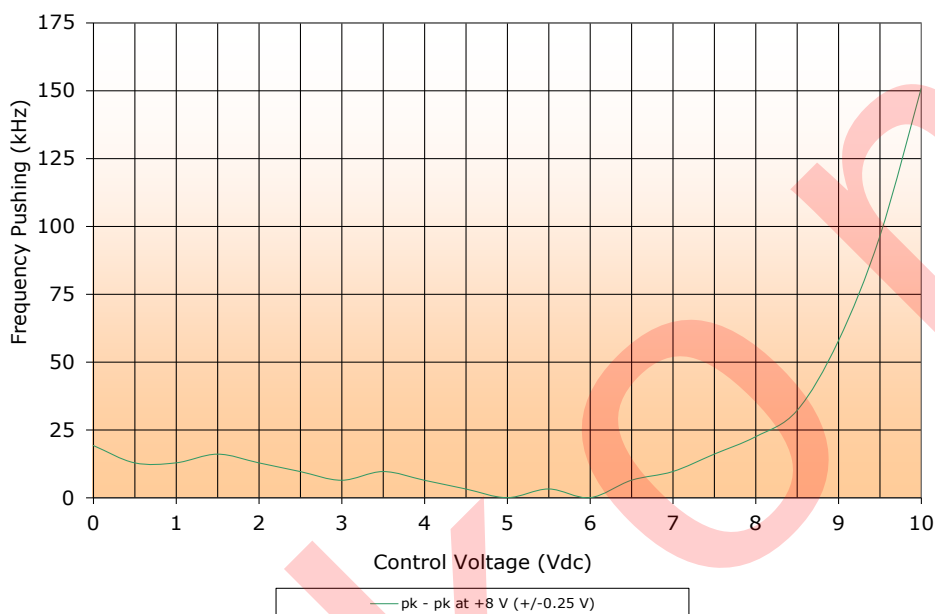

PERFORMANCE PLOTS