


FIXED FREQUENCY SYNTHESIZER

SURFACE MOUNT MODEL: MFSF6950-50-2


6950 MHz

FEATURES:

- ▶ Exceptionally Low Phase Noise
- ▶ No Programming Required
- ▶ Lead Free - RoHS Compliant
- ▶ Patented REL-PRO® Technology
- ▶ Small Size, Surface Mount
- ▶ Buffered Output



Phase Noise

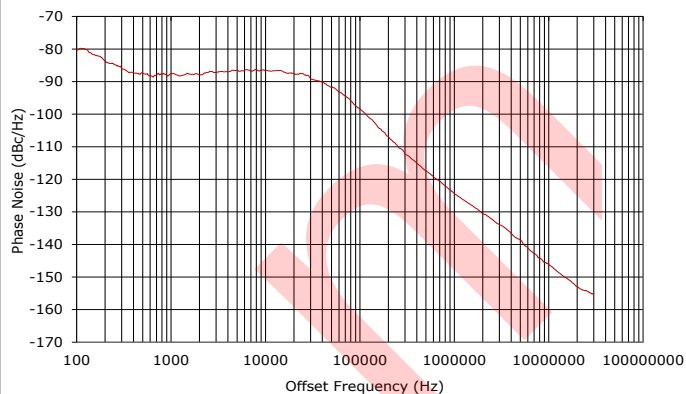

SPECIFICATIONS

Frequency	6950 MHz		
Reference Input Frequency	50 MHz (External)		
Reference Input Voltage	1.0 V p-p to 3.0 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max.)
	Digital	+3	18
	VCO	+5	65
	VTune	+15	5
Output Power	+2 dBm (Min.)		
Spurious Suppression	70 dB (Typ.)		
Harmonic Suppression	35 dB (Typ.)		
Power-Up Time	90 mSec (Max.) ¹		
Output Impedance	50 Ohms (Nom.)		
Lock Detect Indicator	CMOS - 3.0 V		
Typical Phase Noise	Offset		Phase Noise
	@ 1 kHz		-86 dBc/Hz
	@ 10 kHz		-86 dBc/Hz
	@ 100 kHz		-98 dBc/Hz
	@ 1 MHz		-124 dBc/Hz
	@ 10 MHz		-145 dBc/Hz
Operating Temperature Range	-40 to +85 °C		

¹ From stable power on to stable lock detect


¹ From stable power on to stable lock detect

Absolute Maximum Ratings


Storage Temp. Range	-55 to +125 °C
Bias Voltage (Digital)	+3.6 V
Bias Voltage (Tune)	+16 V
Bias Voltage (VCO)	+5.5 V
DC Voltage Applied to RF Out	±25 V

Patent : <http://www.synergymwave.com/patents>

Package # 367

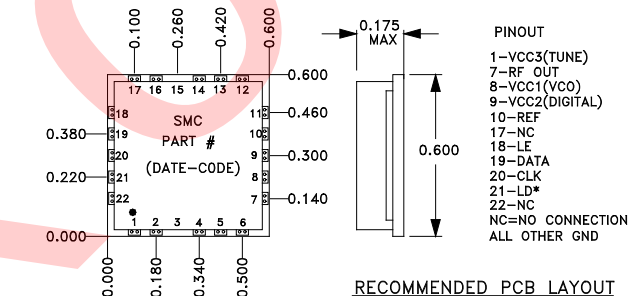

RECOMMENDED PCB LAYOUT

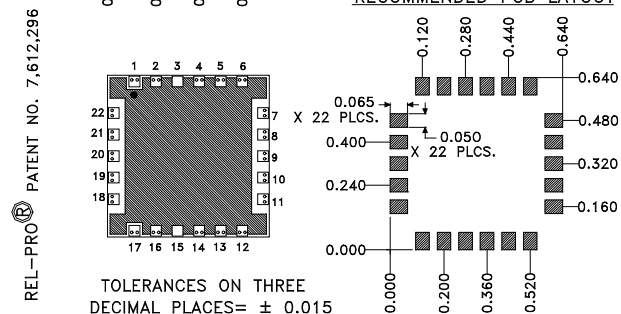

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200 & AN7300

Port Configuration


Pin 5 - RF Out	Pin 25 - Vcc (VCO)	All Others - Ground
Pin 7 - Lock Detect	Pin 27 - Vcc (VTune)	NC - No Connection
Pin 21 - Ref. In	Pin 8 to 19, 24, 26, 28 - NC	
Pin 23 - Vcc (Digital)		

FIXED FREQUENCY SYNTHESIZER


SURFACE MOUNT MODEL: MFSF6950-50-2

6950 MHz

HARMONIC SUPPRESSION

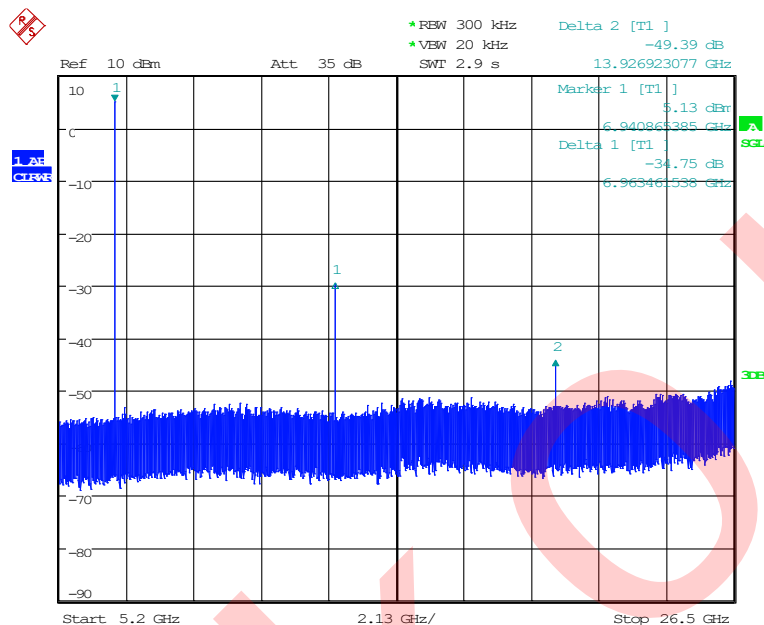

REFERENCE SIDEBAND SUPPRESSION

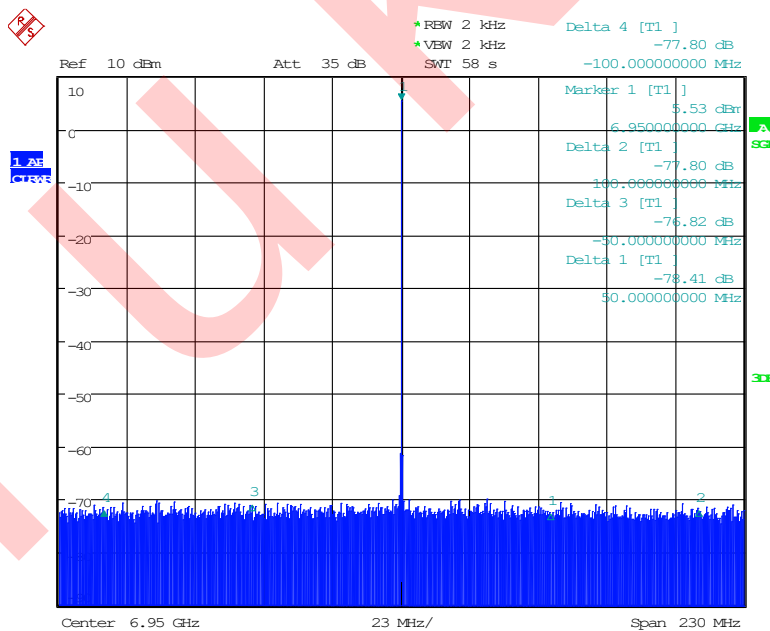

PERFORMANCE PLOTS